END
DATE
FILMED
3 82
DTIC

1.0

1.1

1.25

2.8 2.5

3.2 2.2

3.6

4.0 2.0

1.8

1.4 1.6

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS 1963 A

LEVEL

NONLINEAR TWO-DIMENSIONAL SAIL THEORY

Jean-Marc Vanden-Broeck

AD A110450

Mathematics Research Center
University of Wisconsin—Madison
610 Walnut Street
Madison, Wisconsin 53706

October 1981

(Received September 15, 1981)

DTIC
ELECTE
FEB 4 1982
S
H

DTIC FILE COPY

82 02 03 082

UNIVERSITY OF WISCONSIN - MADISON
MATHEMATICS RESEARCH CENTER

NONLINEAR TWO-DIMENSIONAL SAIL THEORY

Jean-Marc Vanden-Broeck

Technical Summary Report #2293

October 1981

ABSTRACT

Steady two-dimensional flow past a sail is considered. The sail is
assumed to be supported by two masts. The flow and the shape of the sail are
determined as functions of the direction α of the flow at infinity and the
Weber number λ. The full nonlinear problem is formulated as an integro-
differential equation for the shape of the sail. This equation is discretized
and solved numerically by Newton's method. Sail profiles, the slack in the
sail, and the lift coefficient are presented for various values of α and
λ.

SIGNIFICANCE AND EXPLANATION

We consider the flow past a two-dimensional sail supported by two masts. Previous investigators (Thwaites[1], Nielsen[2], Tuck and Haselgrove[3], Vanden-Broeck and Keller[5]) derived approximate solutions for this problem by linearizing the boundary condition on the sail. In this paper we provide an exact numerical solution of the fully nonlinear problem. This solution can be used to estimate the range of validity of the previous approximate solutions.

Although this problem is very specific, the technique used to solve it can be viewed as a general method of the theory of aerodynamic surfaces formed by flexible membranes. Examples of such surfaces are parawings, rotor blades and glider wings utilizing flexible lifting surfaces. Other applications involve the study of pneumatic structures such as those sometimes used to cover sport arenas.

Our method to treat the basic nonlinear equation is new. In addition it is easier to use than the approximate methods of Thwaites[1] and Nielsen[2], which the present work improves.

NONLINEAR TWO-DIMENSIONAL SAIL THEORY

Jean-Marc Vanden-Broeck

1. Introduction

We consider the deformation of a two-dimensional sail due to the steady potential flow of an incompressible inviscid fluid around it (see Fig. 1). The sail is supported by two masts and is characterized by its constant tension σ and by the distance c between the two masts. The fluid has density ρ and velocity U at infinity. As we shall see, the shape of the sail is determined by the direction α of the flow at infinity and by the Weber number

$$\lambda = 2\rho c U^2/\sigma \quad . \tag{1}$$

This problem was first considered by Thwaites[1] and Nielsen[2]. These authors obtained approximate solutions for α small by using thin aerofoil theory. Their work was further generalized by Tuck and Haselgrove[3] and Dugan[4]. More recently Vanden-Broeck and Keller[5] obtained an asymptotic solution for λ small for arbitrary values of α.

In the present paper we solve the fully nonlinear problem numerically. In Sec. II we formulate the problem as an integrodifferential equation for the unknown shape of the sail. In Sec. III we present a method to solve this equation numerically. The method involves

discretization, which converts the equation into a set of nonlinear algebraic equations. Then it employed Newton's method to solve these equations. The results obtained are discussed in Sec. IV.

Many different families of solutions exist. Tuck and Haselgrove's[6] stability analysis shows that only one family of solutions is stable for α small. Therefore we present only numerical results for this family. It is found that for each value of α there is a maximum value of the Weber number λ above which this family fails to exist.

II. Formulation.

Let us consider the steady two-dimensional flow of an inviscid in-compressible fluid past an inextensible and flexible sail. The flow configuration, the sail and the coordinates are sketched in Fig. 1.

The leading edge or luff of the sail is attached to a mast at $x = 0$, $y = 0$ and the trailing edge or leach is attached to another mast at $x = c$, $y = 0$. At infinity we require that the flow have speed U and direction α.

We introduce dimensionless variables by taking c as the unit length and U as the unit velocity. Let the shape of the sail be described in dimensionless variables by $y = F(x)$, $0 \leq x \leq 1$. The conditions of attachment to the masts imply

$$F(0) = F(1) = 0 .\tag{2}$$

The difference between the pressures on the two sides of the sail is balanced by $\kappa(x)\sigma$, where κ is the curvature of the sail and σ is the constant tension in it. By using Bernoulli's equation we obtain in dimensionless variables

$$\kappa(x) = \frac{\lambda}{4} \left[q^-(x)^2 - q^+(x)^2 \right] . \tag{3}$$

Here $q^+(x)$ and $q^-(x)$ are the flow velocities above and below the sail, respectively. The parameter λ is the Weber number defined by (1).

It is convenient to introduce the complex perturbation velocity

$$a - ib = u - \cos \alpha - i(v - \sin \alpha) . \tag{4}$$

Here u and v denote respectively the chordwise and normal components of the velocity. The function $a - ib$ is an analytic function of $z = x + iy$ which vanishes at infinity. Therefore we can write, by using the Plemelj formula

$$a^+(x) + a^-(x) - i[b^+(x) + b^-(x)] \tag{5}$$

$$= \frac{i}{\pi} \int_0^1 \frac{\{[a^-(x_1) - a^+(x_1)] - i[b^-(x_1) - b^+(x_1)]\}[1 + iF'(x_1)]}{(x_1 - x) + i[F(x_1 - F(x)]} dx_1 .$$

The integral in (5) is of Cauchy principal value form.

The velocity must be tangent to the sail on both sides. Thus we have

$$v^\pm(x) = u^\pm(x)F'(x) , \qquad 0 \le x \le 1 . \tag{6}$$

Using the definition (4), we can rewrite (6) in the more convenient form

$$b^+(x) - b^-(x) = [a^+(x) - a^-(x)]F'(x) , \tag{7}$$

$$b^+(x) + b^-(x) = -2 \sin\alpha + [a^+(x) + a^-(x)]F'(x) + 2\cos\alpha \, F'(x) \; . \quad (8)$$

By substituting (7) into (5) and taking real and imaginary parts we obtain

$$b^+(x) + b^-(x) = \frac{1}{\pi} \int_0^1 \frac{[a^+(x_1) - a^-(x_1)][1 + F'(x_1)^2](x_1 - x)}{(x_1 - x)^2 + [F(x_1) - F(x)]^2} \, dx_1 \; , \quad (9)$$

$$a^+(x) + a^-(x) = -\frac{1}{\pi} \int_0^1 \frac{[a^+(x_1) - a^-(x_1)][1 + F'(x_1)^2][F(x_1) - F(x)]}{(x_1 - x)^2 + [F(x_1) - F(x)]^2} \, dx_1 \; . \quad (10)$$

We now rewrite (3) in the form

$$\frac{F''(x)}{[1 + F'(x)^2]^{3/2}} + \frac{\lambda}{4} [a^+(x) - a^-(x)][1 + F'(x)^2][2\cos\alpha \quad\quad (11)$$

$$+ a^+(x) + a^-(x)] = 0 \; .$$

Finally we impose the Kutta condition at $x = 1$ by requiring

$$a^+(1) = a^-(1) \; . \quad\quad\quad (12)$$

The condition (12) is clearly not satisfactory when

$$F'(x) \sim (1 - x)^\nu \quad \text{with} \quad \nu \leqslant -\frac{1}{2} \quad \text{as} \quad x \rightarrow 1 \; .$$

However such exceptional cases did not occur in the numerical solution. We shall consider only values of α between 0 and $\pi/2$ so that the Kutta condition is imposed at the trailing edge.

For given values of λ and α relations (8)-(12) define a nonlinear system of integrodifferential equations for the unknowns $F(x)$, $a^+(x)$, $a^-(x)$, $b^+(x)$ and $b^-(x)$.

By substituting (7), (9) and (10) into (8) and (11) we obtain the
following reduced system of equations for the two unknowns $a^+(x) - a^-(x)$
and $F(x)$:

$$\frac{1}{\pi} \int_0^1 \frac{[1 + F'(x_1)^2][a^+(x_1) - a^-(x_1)]\{(x_1 - x) + F'(x)[F(x_1) - F(x)]\}}{(x_1 - x)^2 + [F(x_1) - F(x)]^2}$$

$$= -2\sin\alpha + 2\cos\alpha \; F'(x) , \tag{13}$$

$$\frac{F''(x)}{[1 + F'(x)^2]^{3/2}} + \frac{\lambda}{4} [a^+(x) - a^-(x)][1 + F'(x)^2]$$

$$\cdot \left\{ 2\cos\alpha - \frac{1}{\pi} \int_0^1 \frac{[a^+(x_1) - a^-(x_1)][1 + F'(x_1)^2][F(x_1) - F(x)]}{(x_1 - x)^2 + [F(x_1) - F(x)]^2} \, dx_1 \right\}$$

$$= 0 . \tag{14}$$

This system is solved numerically in the next section.

From the solution we can then compute the slack ℓ in the sail by the
formula

$$\ell = \int_0^1 \{1 + [F'(x)]^2\}^{1/2} dx - 1 . \tag{15}$$

Following Thwaites[1] we define the parameter β by the relation

$$\beta = \sin 2\alpha / 2\ell^{1/2} \tag{16}$$

The lift coefficients is obtained from the solution by substituting (7)
into the formula (15) given by Vanden-Broeck and Keller[5]. Thus we obtain

$$C_L = \left| 2 \int_0^1 [a^-(x) - a^+(x)]\{1 + [F'(x)]^2\} dx \right| . \tag{17}$$

-5-

III. Numerical analysis.

In order to solve the system of equations defined by (2), (12), (13) and (14) we introduce the mesh points

$$x_I = (I - 1)/(N - 1) , \qquad I = 1,\ldots,N , \qquad (18)$$

and the corresponding unknowns

$$F_I = F(x_I) , \qquad I = 1,\ldots,N , \qquad (19)$$

$$A_I^- = a^+(x_I) - a^-(x_I) , \qquad I = 2,\ldots,N . \qquad (20)$$

Relations (2) and (12) imply $F_1 = F_N = 0$ and $A_N = 0$ so that there are only $2N - 4$ unknowns F_I and A_I^-.

We shall satisfy the equations (13) and (14) at the N-3 intermediate mesh points

$$x_{I+1/2} = (x_I + x_{I+1})/2 , \qquad I = 2,\ldots,N-2 . \qquad (21)$$

First we compute $F'(x_I)$, $F'(x_{I+1/2})$, $F''(x_{I+1/2})$, $F(x_{I+1/2})$ and $a^+(x_{I+1/2})$ $- a^-(x_{I+1/2})$ in terms of F_I and F_I^- by four point formulas.

Next we evaluate the integrals in (13) and (14) by using the trapezoidal rule with the mesh points x_I. The mesh points x_I are locally symmetric about $x_{I+1/2}$ and the quadrature formula is also symmetric. Therefore the contribution from the neighborhood of the singularity cancels out, permitting us to evaluate the Cauchy principal value as if it were an ordinary integral.

In doing so it is important to notice that the integrands in (13) and (14) behave like $x^{-1/2}$ as $x \to 0$. We handle these singularities by subtracting the singular part before integrating numerically. We then integrate the singular part analytically.

By discretizing (13) and (14) we obtain $2N - 6$ nonlinear algebraic equations for the $2N - 4$ unknowns F_I and A_I^-. An extra equation is obtained by imposing the Kutta condition at $x = 1$ via the relation

$$\lim_{x \to 1} (1 - x)^{1/2} [a^+(x) - a^-(x)] = 0 . \tag{22}$$

A three point Lagrange extrapolation formula is used to evaluate the limit in terms of A_I^-. The last equation is obtained by imposing (2) by means of a three point Lagrange formula.

For given values of λ and α this system of equations is solved by Newton's method. The values of β and C_L can then be computed by quadrature from (16) and (17).

IV. <u>Discussion of the results.</u>

We have used the method described in Sec. III to compute solutions for various values of λ and α. Many different families of solutions exist. They have been studied for α small by Thwaites[1]. These families can be computed for arbitrary α and λ in the following way. For a given value of λ we compute the solution for a small value of α by using the uniform stream (i.e. the solution corresponding to $\alpha = 0$) as the initial guess. Providing λ is not close to any of the critical values described by Thwaites[1], the numerical scheme converges rapidly to Thwaites' solution for the given value of λ. Once a given solution has been obtained, however, a type of 'boot-strap' technique is employed, that is a converged

solution for one value of λ is used as the initial guess for a solution with λ altered by a few per cent. Similarly, for fixed λ, the angle α could be varied using a neighboring solution as a starting guess.

Among all these possible solutions, only one is "reasonable" in the sense that it has a simple unimodal shape cambered to lee of the wind. Tuck and Haselgrove's[6] stability analysis shows that this family of solutions is the only stable one for α small. Therefore we extend only this family to the nonlinear case.

Typical profiles are shown in Figs. 1 and 2. The values of β and C_L for $\alpha = \pi/4$ are shown as functions of λ in Figs. 3 and 4. The broken lines correspond to the asymptotic formulas (14) and (20) given by Vanden-Broeck and Keller[5]. The asymptotic formula for β agrees with the numerical results within fifteen percent for $\lambda < 0.3$.

In Fig. 5 we present the values of λ versus β for $\alpha = \pi/100$ and $\alpha = \pi/10$. The broken line corresponds to Thwaites' solution. It shows that his solution is a good approximation for α small, but it is not uniform as β tends to zero. The discrepancy between his solution and the exact numerical solution increases rapidly as β gets close to zero. In the particular case $\beta = 1$, the values of C_L were computed for various values of α. The numerical values of C_L were found to agree with Thwaites' solution within 5% for $\alpha < \pi/18$, 20% for $\alpha < \pi/6$ and 30% for $\alpha < \pi/4$.

Figs. 3 and 5 and similar results obtained for different values of α indicate that for each value of α there exists a maximum value $\lambda_0(\alpha)$ of the Weber number above which there is no solution of the kind considered here. For a given value of α there are two solutions for each value of the Weber number in an interval below the maximum value. This non-

uniqueness is likely to be of mathematical interest only. The reason for this is that the branch on the left of the maximum is probably unstable. After all it corresponds to an increase of the tension arising from an increase in the slack. This suggests that the physically realizable solutions correspond to $\lambda > \lambda_0(\alpha)$.

As α increases, the slope of the profile increases at the leading edge. This was found to limit the accuracy of the numerical scheme. Accurate solutions for $\alpha \geq \pi/3$ and $\lambda \sim \lambda_0(\alpha)$ could not be computed with $N \leq 35$.

Finally it is worthwhile mentioning that the present model is not physical for α large since separation is then likely to occur. A more realistic model for α large was proposed by Dugan[4].
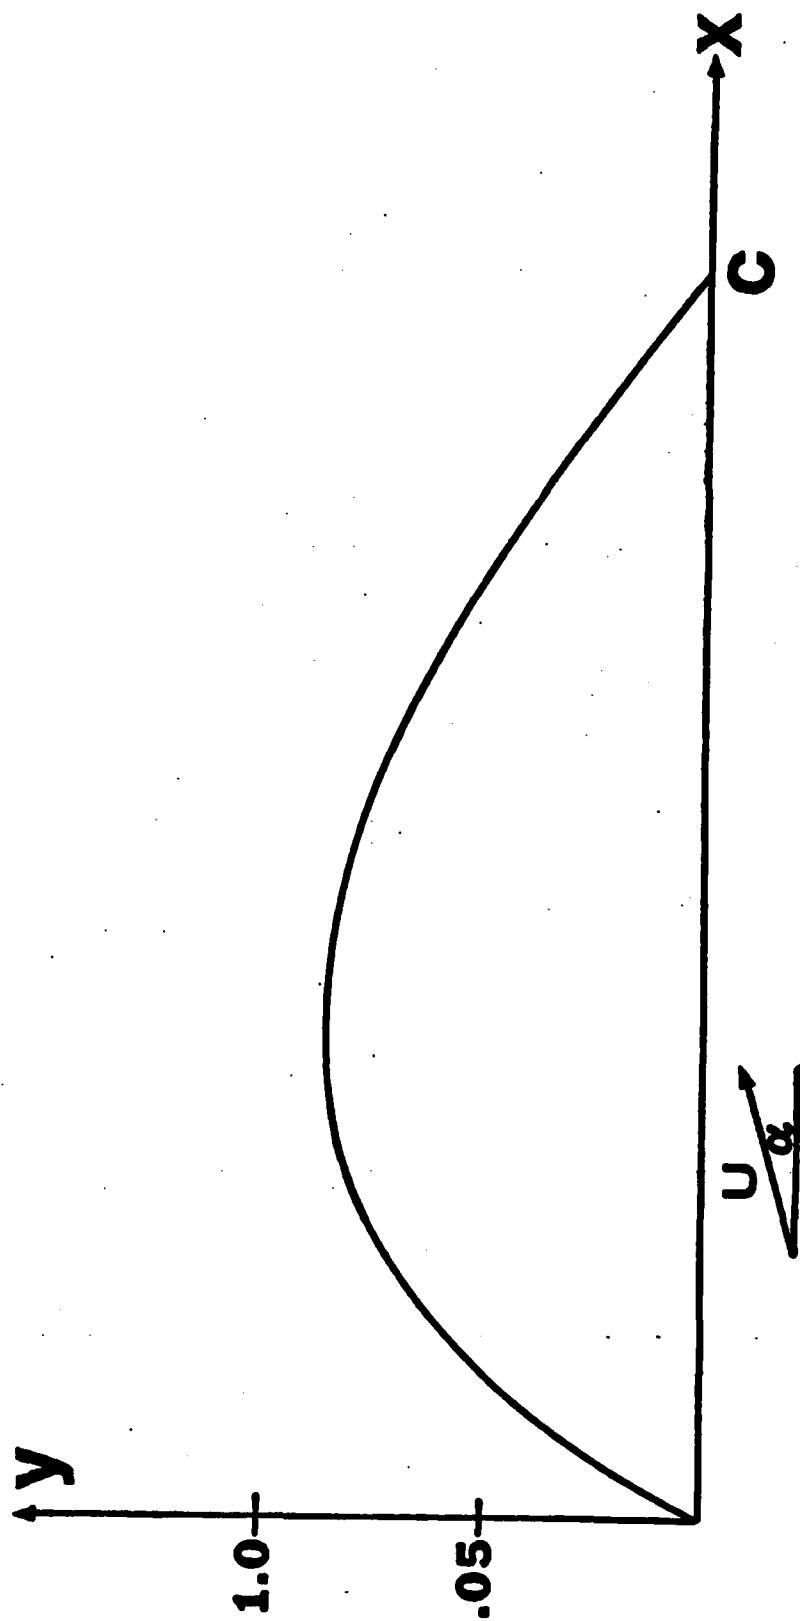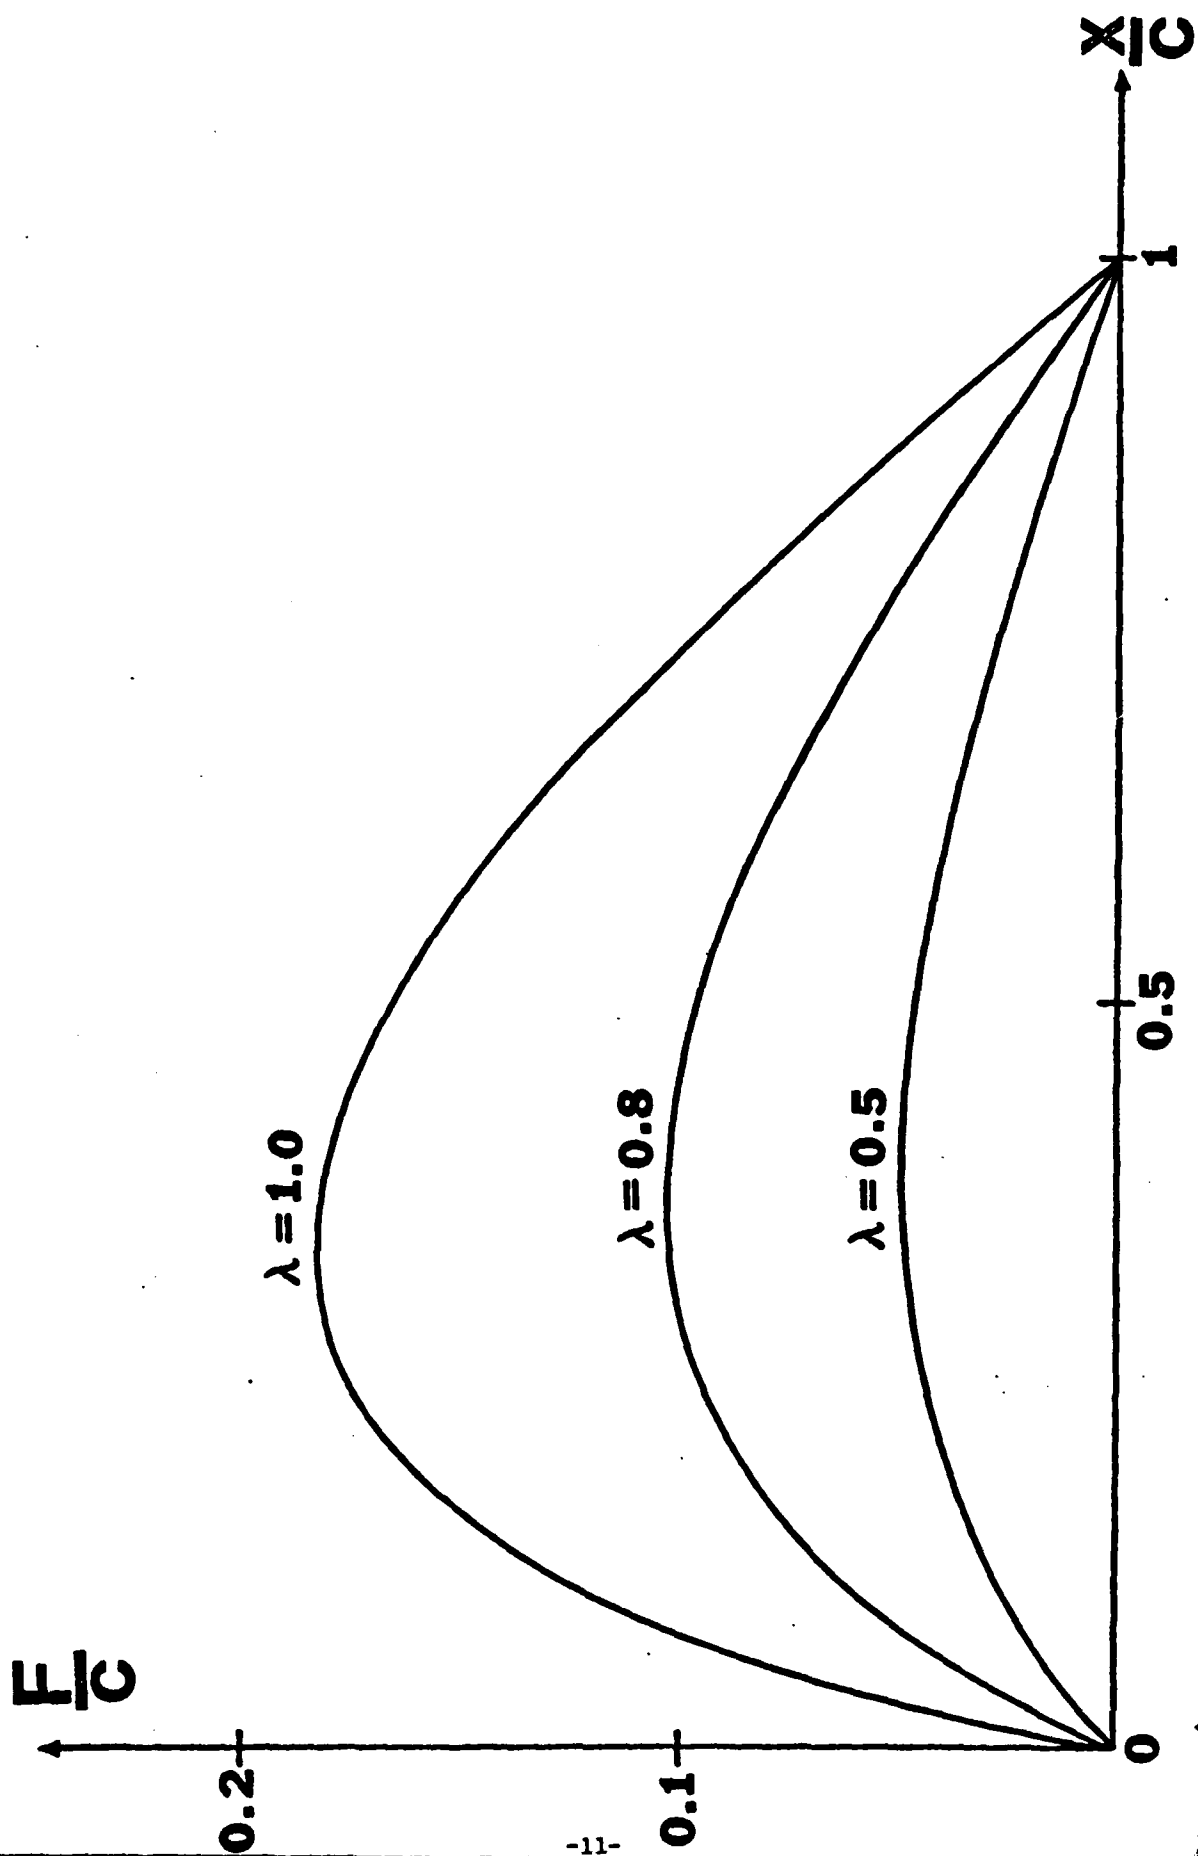
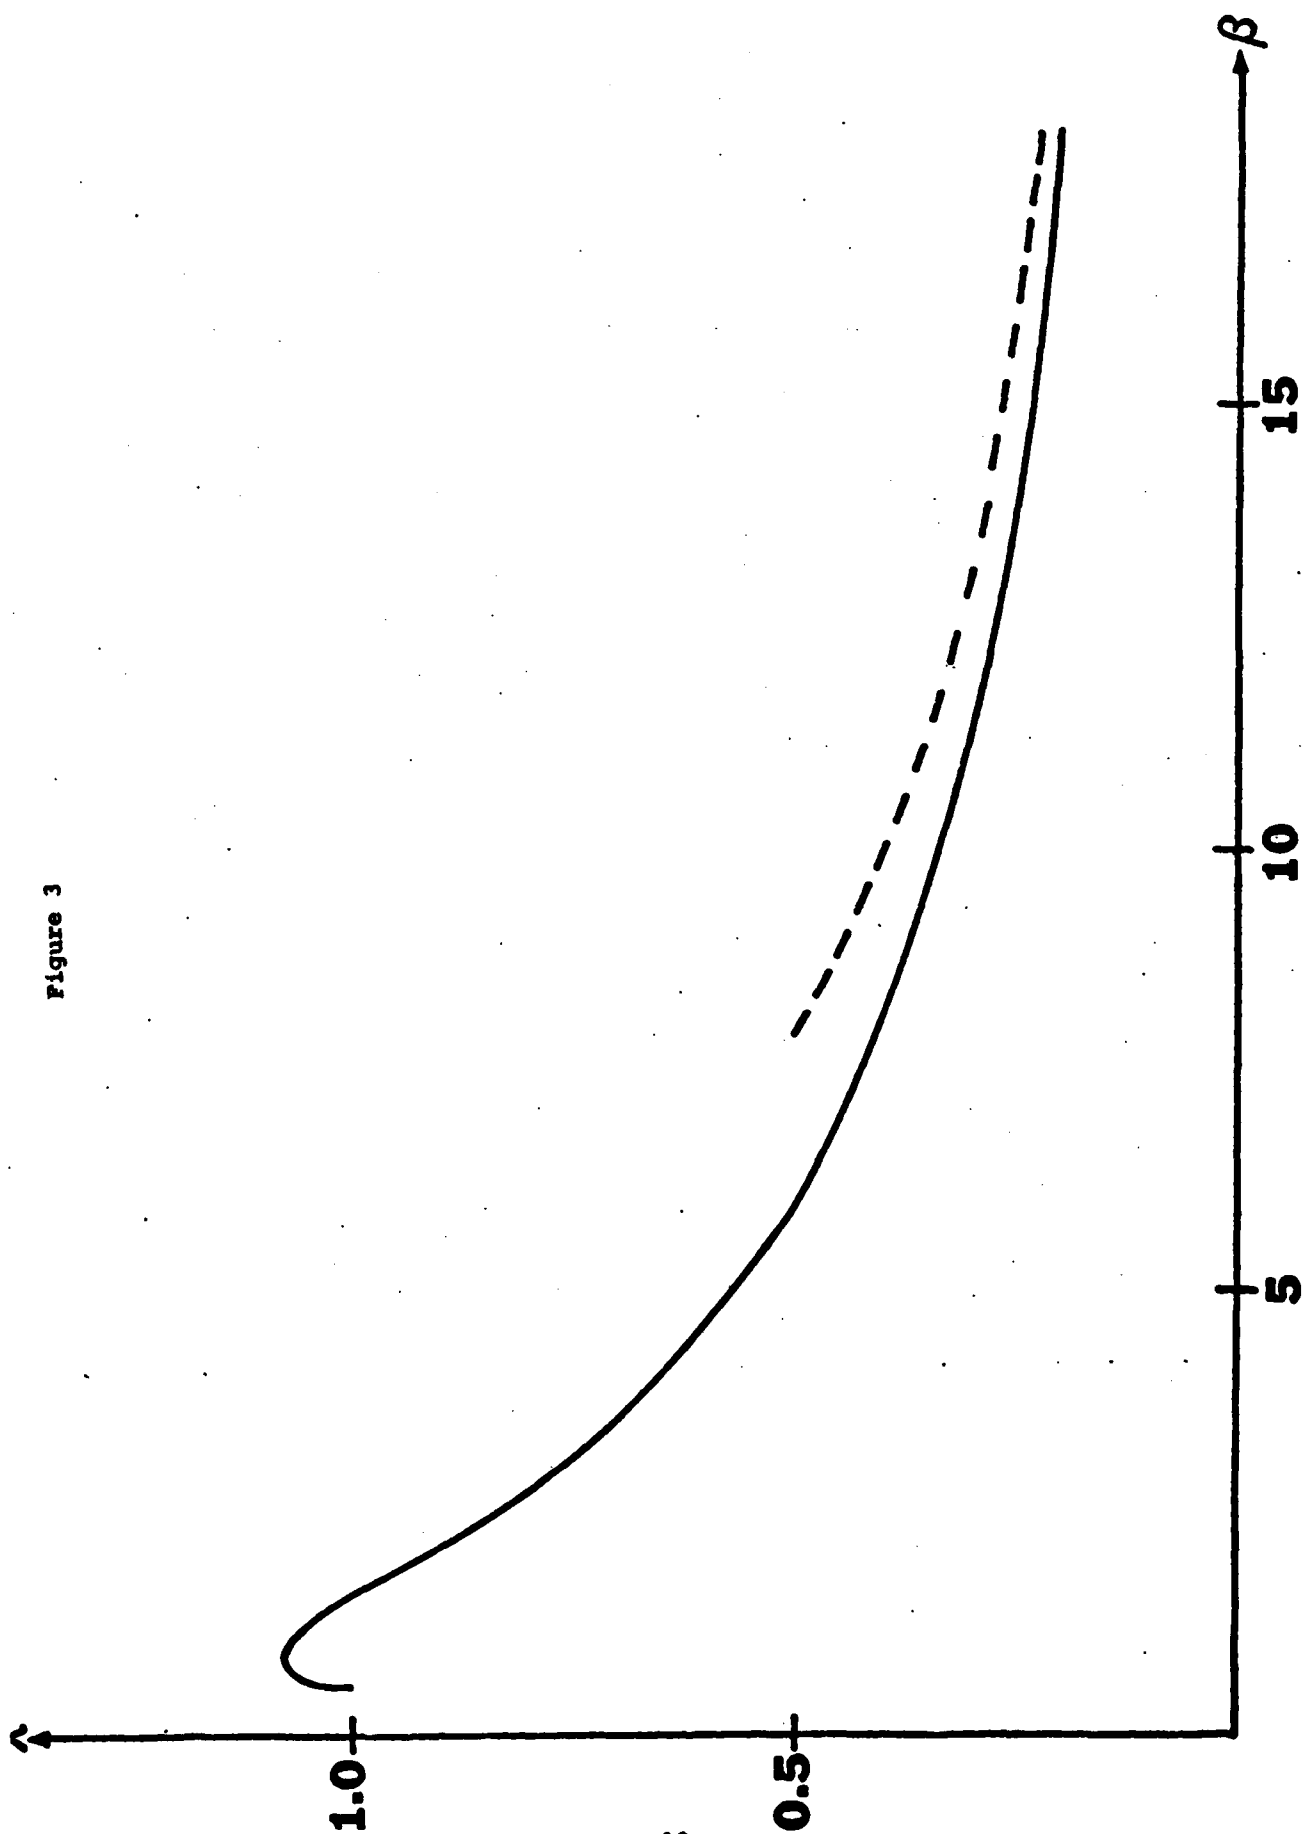Figure 1

Figure 2

Figure 3

Figure 4

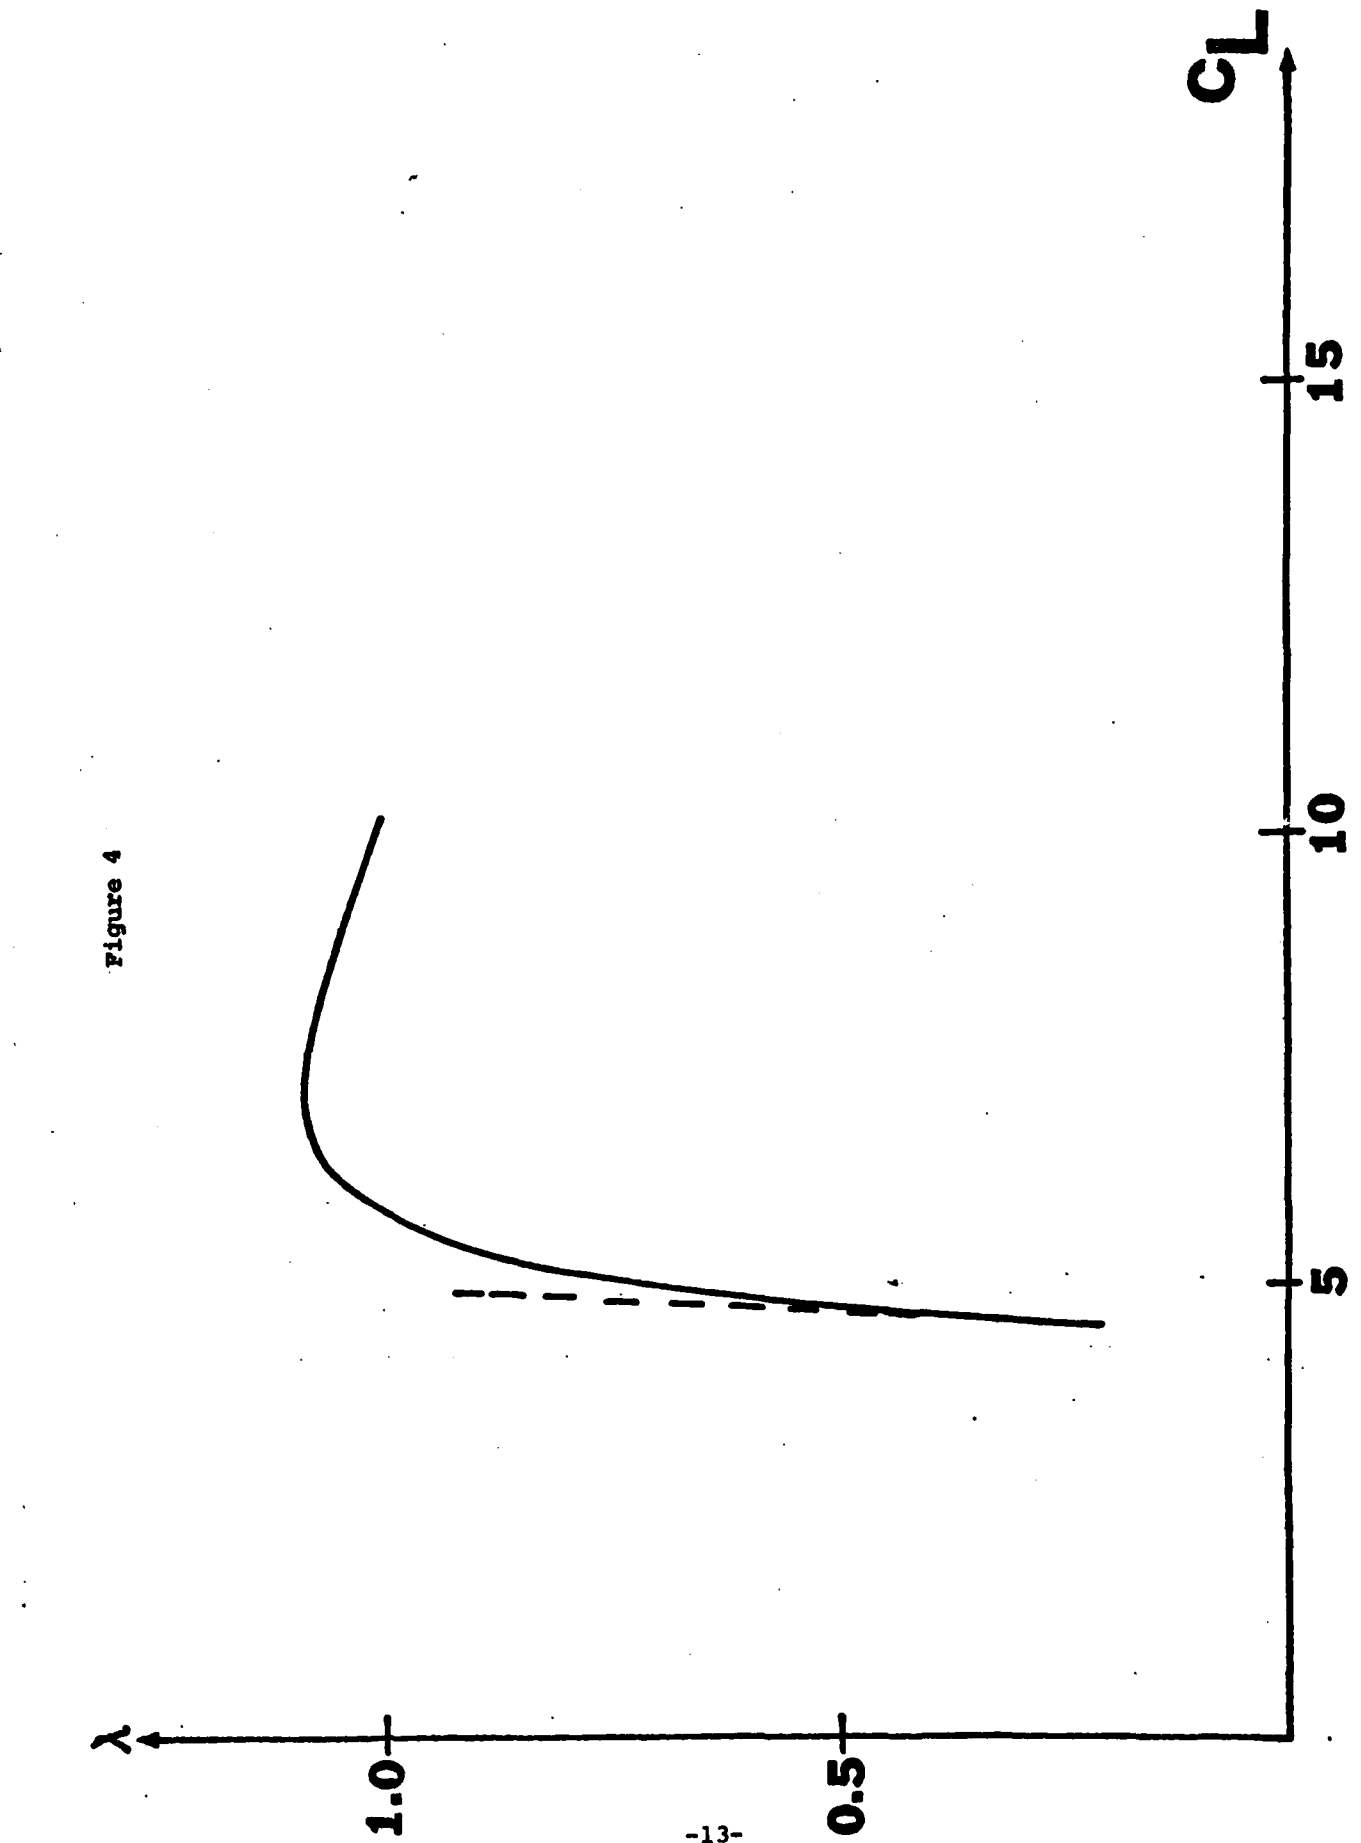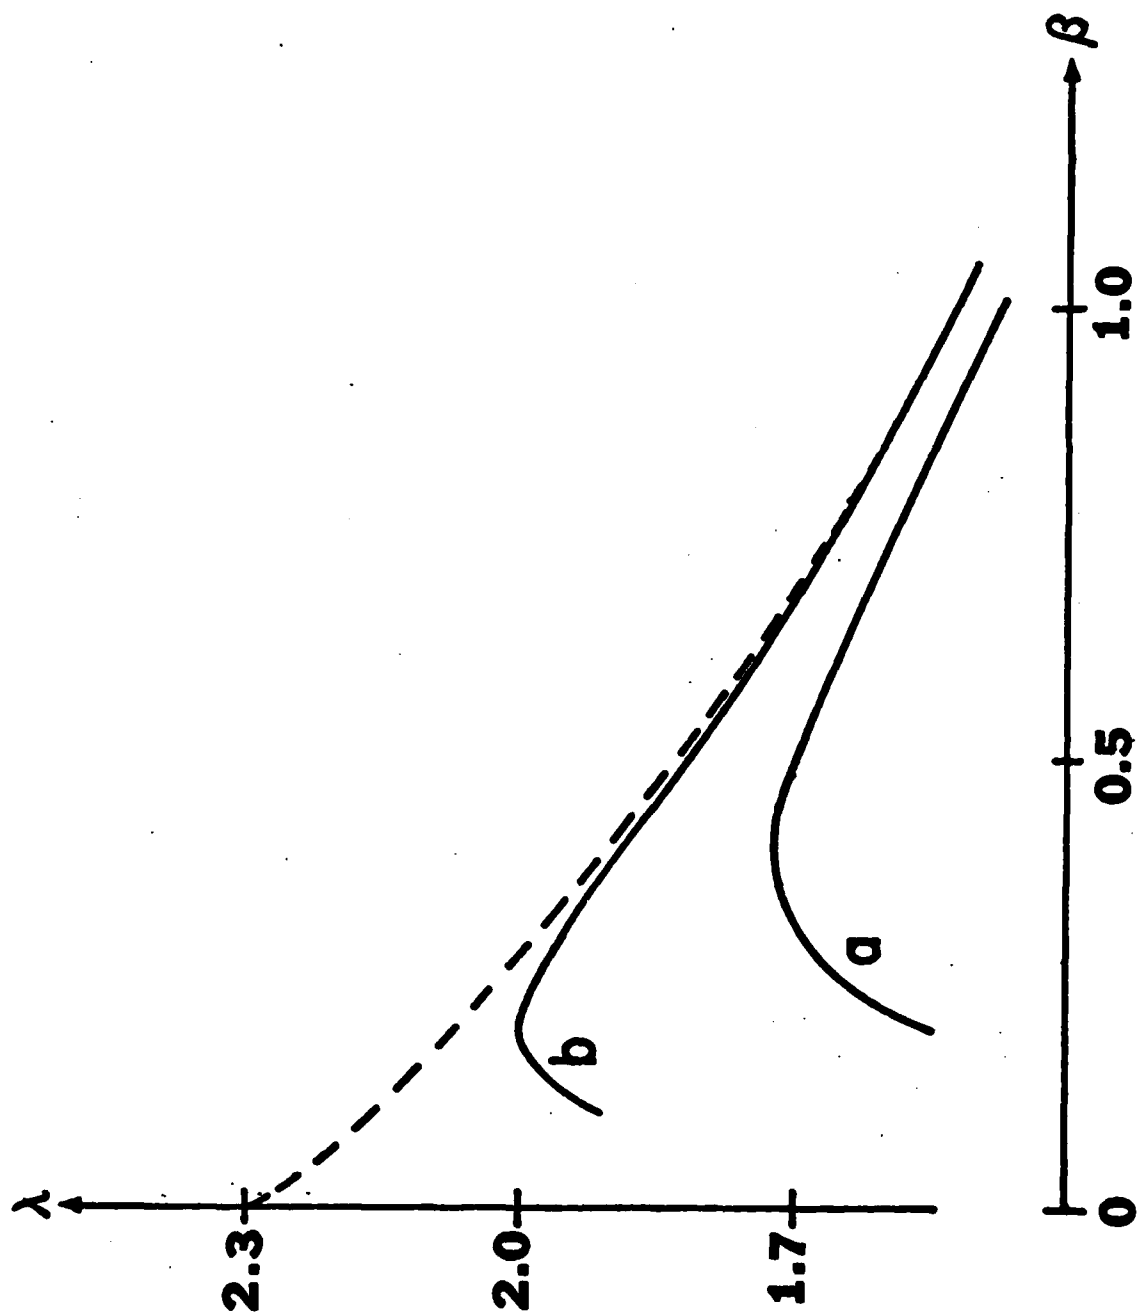Figure 5

Captions for Figures

Figure 1. Computed profile of a sail with $\alpha = \pi/6$, $\lambda = 0.82$ and $\beta = 3.0$. The unit length in y is c.

Figure 2. Computed profiles of a sail with $\alpha = \pi/4$ of $\lambda = 0.5$, 0.8 and 1.0. The corresponding values of β are respectively: 6, 2.8 and 1.6. The unit length in which both x and y are measured is c.

Figure 3. Values of the Weber number λ as a function of β for $\alpha = \pi/4$. The dashed curve corresponds to Vanden-Broeck and Keller's asymptotic formula.

Figure 4. Values of the lift coefficient C_L as a function of β for $\alpha = \pi/4$. The dashed curve corresponds to Vanden-Broeck and Keller's asymptotic formula.

Figure 5. Values of the Weber Number λ as a function of β for $\alpha = \pi/100$ (curve a) and $\alpha = \pi/10$ (curve b). The dashed curve corresponds to Thwaites' calculations.

References

1. B. Thwaites, Proc. Roy. Soc. A261, 402 (1961).

2. J. N. Nielsen, J. Appl. Mech. E30, 435 (1963).

3. E. O. Tuck and M. Haselgrove, J. Ship Res. 16, 148 (1972).

4. J. P. Dugan, J. Fluid Mech. 42, 433 (1970).

5. J.-M. Vanden-Broeck and J. B. Keller, Phys. Fluids, 24, 552 (1981).

6. M. K. Haselgrove and E. O. Tuck, in New England Sailing Yacht
    Symposium, Society of Naval Architects and Marine Engineers, New
    York, pp. 8.1-8.11 (1976).

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER #2293	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Nonlinear Two-Dimensional Sail Theory		5. TYPE OF REPORT & PERIOD COVERED Summary Report - no specific reporting period
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Jean-Marc Vanden-Broeck		8. CONTRACT OR GRANT NUMBER(s) MCS-7927062, Mod. 1 DAAG29-80-C-0041
9. PERFORMING ORGANIZATION NAME AND ADDRESS Mathematics Research Center, University of 610 Walnut Street Wisconsin Madison, Wisconsin 53706		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Work Unit Number 2 - Physical Mathematics
11. CONTROLLING OFFICE NAME AND ADDRESS (see Item 18 below)		12. REPORT DATE October 1981
		13. NUMBER OF PAGES 16
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

sail, integro-differential equation, Newton's method

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

Steady two-dimensional flow past a sail is considered. The sail is assumed to be supported by two masts. The flow and the shape of the sail are determined as functions of the direction α of the flow at infinity and the Weber number λ. The full nonlinear problem is formulated as an integrodifferential equation for the shape of the sail. This equation is discretized and solved numerically by Newton's method. Sail profiles, the slack in the sail, and the life coefficient are presented for various values of α and λ.

DAT
FILM